

See 20x in HD

1.3Megapixel 20x Zoom Network Camera



1.3Megapixel HD 20x Zoom Network Camera

SNZ-5200

The SNZ-5200 is a high performance 1.3 megapixel zoom camera and provides 20x optical zoom in HD images. This fully ONVIF compliant camera feature multiple displaying resolution from CIF (320 x 240) through to 16:9 format 720p High Definition and up to full 1.3 megapixel (1280 x 1024) and provides simultaneous transmission, which allows the optimal streaming to your viewing or recording device for simultaneous viewing/recording with data transmission. Now users can monitor a scene far away from the camera in more detail, at higher quality of image.

- Max. 1.3M (1280 x 1024) resolution
- 16:9 HD (720p) resolution support
- Built-in 20x optical zoom lens (4.45~89mm)
- H.264 / MPEG-4 / MJPEG multiple codecs
- PoE, SD memory slot

1.3Megapixel HD 20x Zoom Network Camera

SNZ-5200




Specifications



SNZ-5200N/P	
VIDEO	
Imaging Device	1/3" 1.3M PS CMOS
Total Pixels	1,384(H) x 1,076(V)
Effective Pixels	1,329(H) x 1,049(V)
Scanning System	Progressive
Min. Illumination	Color : 0.7Lux (F1.2, 50IRE), 0.01Lux (Sens-up 60x, 50IRE), B/W : 0.08Lux (F1.6, 50IRE), 0.001Lux (Sens-up 60x, 50IRE)
S / N Ratio	52dB
Video Output	CVBS : 1.0 Vp-p / 75Ω composite, 704 x 480(N), 704 x 576(P), for installation
LENS	
Focal Length (Zoom Ratio)	4.45 ~ 89mm (20x)
Max. Aperture Ratio	F1.6(Wide) / F2.9(Tele)
Angular Field of View	H : 56.56°(Wide) ~ 3.10°(Tele) / V : 43.32°(Wide) ~ 2.34°(Tele)
Min. Object Distance	1m (3.28ft)
Focus Control	AF / One-shot AF / Manual (Remote control via Network)
Lens Type	DC auto iris
Mount Type	Board-in type
PAN / TILT / ROTATE	
Preset	128ea
OPERATIONAL	
Camera Title	Off / On (Displayed up to 15 characters)
Day & Night	Auto (ICR) / Color / B/W
Backlight Compensation	Off / BLC / HLC
Contrast Enhancement	SSDR (Samsung Super Dynamic Range) (Off / On)
Digital Noise Reduction	SSNRIII (2D+3D noise filter) (Off / On)
Digital Image Stabilization	Off / On
Motion Detection	Off / On (4 programmable zones)
Privacy Masking	Off / On (8 programmable zones)
Sens-up (Frame Integration)	Off / Auto (2x ~ 60x)
Gain Control	Off / Low / Medium / High / Manual
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	Auto / A.FLK / Manual (1/30 ~ 30,000sec)
Digital Zoom	16x
Flip / Mirror	Off / On
Intelligent Video Analytics	Scene change, Virtual line, Enter / Exit, Appear / Disappear
Alarm I/O	Input 1ea / Output 1ea (Relay)
Remote Control Interface	RS-485
RS-485 Protocol	Samsung-T/E, Pelco-P/D
NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression Format	H.264, MPEG-4, MJPEG
Resolution	1280 x 1024, 1280 x 720P (HD), 1024 x 768, 800 x 600, 640 x 480, 320 x 240
Max. Framerate	Max. 30fps at all resolutions
Video Quality Adjustment	H.264 / MPEG-4 : Compression level, Target bitrate level control
Bitrate Control Method	MJPEG : Quality level control
Streaming Capability	H.264 / MPEG-4 : CBR or VBR, MJPEG : VBR
Audio I/O	Multiple streaming (Up to 10 profiles)
Audio I/O	Mic / Line in, Line out
Audio Compression Format	G.711 u-law
Audio Communication	2-Way
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTSP, NTP, HTTP, HTTPS, SSL, DHCP, PPPoE
Security	FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS
Streaming Method	HTTPS(SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1x authentication
Max. User Access	Unicast / Multicast
Memory Slot	SD/SDHC memory slot
ONVIF Conformance	Yes
Webpage Language	English, French, German, Spanish, Italian, Chinese, Korean, Russian, Japanese, Swedish, Danish, Portuguese, Turkish, Polish, Czech, Rumanian, Serbian, Dutch, Croatian, Hungarian, Greek
Web Viewer	Supported OS : Windows XP / VISTA / 7, MAC OS, Supported Browser : Internet Explorer 6.0 or Higher, Firefox, Google Chrome, Apple Safari
Central Management Software	NET-i viewer
ENVIRONMENTAL	
Operating Temperature / Humidity	-10°C ~ +50°C (+14°F ~ +122°F) / 20 ~ 80% RH
ELECTRICAL	
Input Voltage / Current	12V DC, PoE (IEEE802.3af)
Power Consumption	12V DC : Max. 5.2W, PoE : Max. 7.5W
MECHANICAL	
Color / Material	Dark gray / Metal
Dimensions (WxHxD)	72 x 60 x 136mm (2.83" x 2.36" x 5.35")
Weight	540g (1.19 lb)

Dimensions

Unit : mm (inch)

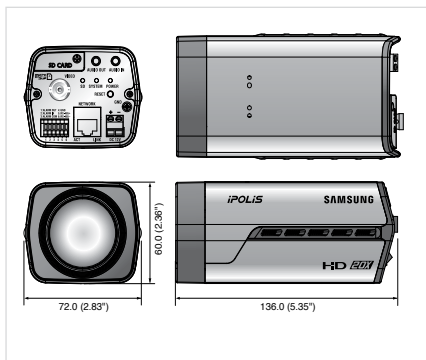

The Eco mark represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.



SAMSUNG TECHWIN CO., LTD.

701, Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do Korea 463-400
Tel : +82-70-7147-8741~8749, 8752~8760 Fax : +82-31-8018-3745
www.samsungsecurity.com www.samsungcctv.com

SAMSUNG TECHWIN AMERICA INC.
100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660
Toll Free : +1-877-213-1222 Direct : +1-201-325-6920
Fax : +1-201-373-0124
www.samsungcctvusa.com

SAMSUNG TECHWIN EUROPE LTD.
Samsung House, 1000 Hillwood Drive, Hillwood Business Park
Chertsey, Surrey, UNITED KINGDOM KT16 0PS
Tel : +44-1932-45-5300 Fax : +44-1932-45-5325

TIANJIN SAMSUNG TECHWIN OPTO-ELECTRONICS CO., LTD.
No.11 Wei 6 Street, Micro-Electronic Industrial Park
Jingang Road, Tianjin, P.R. CHINA 300385
Tel : +86-22-23887788 Fax : +86-22-23887788



Edificio Antalia
Albasanz, 16
28037 MADRID
Tel. 91 567 97 00
Fax: 91 570 26 61

Torre Mapfre-Vila Olímpica
Marina, 16 - Planta 11-C 2
08005 BARCELONA
Tel. 93 459 42 50
Fax: 93 459 42 62

www.alavaingenieros.com

alava@alava-ing.es