



Noise & Vibration



Measurement and Analysis Solutions

for Marine



Made for Your Demanding World

1- Improve Efficiency

2- Maximize Uptime

3- Minimize Costs

Test Cells

- > Prototype validation
- > Factory acceptance



Improve production testing efficiency

- > Integrated & automated test process and report generation
- > User friendly operation
- > Multichannel real-time processing and displays
- > Universal and multiple sensor's types: microphones, acceleration, temperature, strain, pressure...

On-board Testing

- > On-board acceptance
- > Maintenance operation
- > Diagnostics and troubleshooting



Travel light for reliable tests

- > Versatile toolbox for all noise and vibration diagnostics applications
- > Portable and rugged analyzers for field measurements
- > Multichannel simultaneous acquisition
- > Real-time analysis for field efficiency
- > Full signal recording for office processing and archiving


Remote Monitoring

- > Random & unrepeatable phenomena



Optimize costs and prevent failure

- > Alarm triggering warning via email or the Internet
- > Collect raw signal information for thorough office processing



They trust OROS

- > *"With my OROS analyzer, I'm really confident during on-board measurements thanks to its ruggedness and its complete panel of functions."*

Chris RINGLE, 44
Noise and Vibration Maintenance Engineer,
Propulsion Department.

Instruments, Software, Services



Rotating Analysis




FFT Diag

An extension of the standard FFT, features advanced techniques such as cepstrum, envelope analysis and correlation.



Torsion

Look at rotating speed fluctuations without any requirement for an additional frequency to voltage converter.



Synchronous Order Analysis

SOA allows to carry order tracking on RPM resampled signal.

Made for the Field, Flexible, Accurate



- > From 2 to hundreds of channels
- > Portable and rugged
- > Real-time and multi-analysis




Structural Dynamics



FFT

Allows to carry general vibration tests: in particular cross spectra and frequency response functions for coupling and damping applications.



ODS (Operating Deflection Shape)

A module to acquire and display vibrations on structures.




Modal Analysis

An advanced module to carry full modal analysis including EMA and OMA. Allows to calculate and display modal frequencies, damping and shapes.



Data Acquisition



Recorder

Record time domain data and post process them later (ASAM ODS compatible).



Time Domain Analysis

Analyze the signal in the time domain giving a whole set of scalar results.


PC Free Operations



- > Remote Monitoring
- > Autonomous Monitoring
- > Continuous recording



Noise Analysis



1/3rd Octave

Process and display 1/n octave band spectra as well as overall values.

Plug and Play Signal Conditioning



- > Strain gauges (Xpod)
- > Temperature (Xpod)

Anywhere Close to You

- > Trainings
- > Customization & Integration
- > Expertise & Assistance
- > Premium Contracts
- > Hotline
- > Worldwide Accredited Maintenance Centers



Measuring your Ships and Propu



Rotating Analysis




Torsional Analysis

On reciprocating machinery the cause of vibrations often comes from the non-linearity of the angular speed.

Thanks to the **integrated frequency to RPM** converter, the OROS analyzers provide the instantaneous angular speed inside each shaft revolution.

The **analysis of this speed in frequency or time domain** give helpful information for vibrations reduction during prototyping or for source identification while doing service diagnostics.

With **torsional analysis**, detect, follow the torsional resonance of the shaft and, for example, identify problems due to flexible coupling

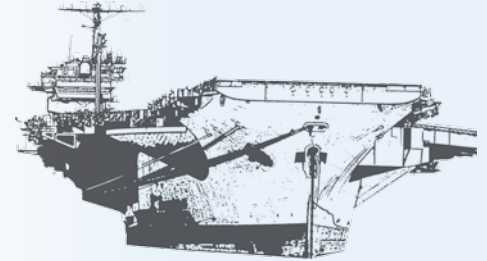


Gear Analysis

Gearboxes is a very critical part of transmission and has specific vibration signature requiring correlation or cepstrum analysis for an accurate diagnostics.

The **correlation** is useful to determine the correlated part of signals from different locations on a structure. This helps tracking the root and cause of vibration phenomena machinery structure and/or cinematic.

The **cepstrum** is an efficient tool to detect periodic shocks in bearings or parts of rotating machinery. It is specially adapted when the spectrum levels are noised with their impulsive components.

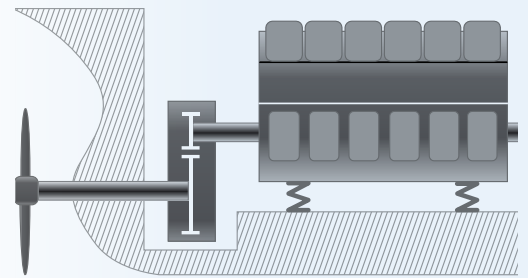

Roller Bearing Analysis

Damaged roller bearings are common vibration sources. Their vibration spectrum, measured with an accelerometer mounted on the casing, allows you to determine mechanical failures on balls or races. **Envelope demodulation**, part of FFT-Diag module, is the key tool for that purpose.



Time Frequency Analysis

The objective is to identify defaults of the engine operation: injection pump malfunction, wear of the injectors, burn out of the valves. The **accurate waterfall** displays in function of **time and frequency acceleration information** from the top engine. Defaults can be detected with the intuitive exploration tools.



ulsion Systems

Shipbuilding

- > Hull
- > Castle
- > Air Conditioning
- > Pumps
- > Compressors

Propulsion Systems

- > Gas Turbines
- > Diesel Engines
- > Generators
- > Motors
- > Gearboxes
- > Flexible Coupling

Structural Dynamics



ODS (Operating Deflection Shape)

A powerful analysis to solve problems related to forced vibrations. Only with few measurement points, determine the source of high vibration level and the structural modifications to be implemented on the machine.



Damping & Isolation

Absorbing and damping mounts are the components through which the vibration energy is transmitted between the engine and the rest of the ship: their properties, dimensions and positions should be determined with care. The techniques used are **cross spectrum**, **transfer functions**, **damping**, as well as **ODS (Operating Deflection Shape)**.



Modal Analysis


Modal Analysis is one of the key steps when testing machines: it determines their structural characteristics and so, defines how they reacts to operating excitations. **Shaker or impact hammer** excitations can be used to capture the experimental datasets: the final stage is the actual **OROS modal analysis**.

Noise Analysis



Structure-Borne Noise Analysis

This technique uses acoustics tools, typically 1/3 octave analysis. The results allow to identify and reduce the transmission to Structure-Borne Noise.



Ordering Information



OROS is a global manufacturer and solution provider of noise and vibration measurement systems.

OROS masters the latest technology of data acquisition, digital signal processing as well as user interface software.

OROS instruments are used in the major sectors of industry and research, for industrial acoustics, structural dynamics and rotating machinery applications. Hardware and software are totally designed in-house.

Now approaching 30-years in business, OROS instruments are renowned as being designed for the field but powerful enough for any lab.



Find out more on the OROS offer in the Range brochure.

Downloadable on www.oros.com

Software Modules

Rotating Analysis

ORNV-SOA	Synchronous Order Analysis plug-in
ORNV-FFTDiag	Real-time diagnostic tool set (Envelope, Cepstrum, Pk; Pk-Pk, Crest factor, shaft view) add-on
ORNV-IVC	Integrated Instantaneous angular Velocity Converter plug-in, allows on-line and offline torsional analysis

Structural Dynamics

ORNV-FFT	Real-time FFT plug-in
ORNVS-MOD300	ODS (Operating Deflection Shape) Solution
ORNVS-MOD350	ODS (Operating Deflection Shape) and Modal Analysis Solution

Data Acquisition

ORNV-REC	Recorder
ORNV-TDA	Real-time time domain analysis plug-in
ORNV-SYSTE0	Remote / stand-alone solution for machinery monitoring

Noise Analysis

ORNV-OCT	Real-time filter based 1/n octave plug-in
----------	---

Instruments

Analyzers: examples of configurations

Above software options may be added to these configurations	
OR34-FREQ-4	OR34-4 Ch. FFT analyzer
OR35-FREQ-8	OR35-8 Ch. FFT analyzer
OR36-FREQ-16	OR36-16 Ch. FFT analyzer
ORMP-FREQ-16	Mobi-Pack-16 Ch. FFT analyzer
OR38-FREQ-32	OR38-32 Ch. FFT analyzer

Inputs Conditioners

OR36/8 - PXD-B	8 Ch. Strain gauges bridge conditioner XPOD for OR36 & OR38
OR36/8 - PXD-T	8 Ch. PT100 and thermocouple conditioner XPOD for OR36 & OR38

Distributed Systems

ORVM-NG-300	300 Ch. Supervisor software license
ORSM-SAT	SmartRouter Satellite, Autonomous analyzer controller

Specifications

Channels count	2 to hundreds of channels
Inputs	
Sampling	2 kS/s to 102.4 kS/s - 24 bits delta sigma ADC
Accuracy	Phase $\pm 0.02^\circ$ - amplitude ± 0.02 dB - Dynamic > 120 dB
Conditioning	AC/DC/ICP/TEDS up to 40 V
Auxiliaries	
Outputs	DC to 40 kHz - ± 10 V range - 24 bits DACs - THD < 0.002%
Ext. synch (Trigger / Tach)	64 x over sampled - Resolution < 160 ns (0.06° @ 1 kHz) - up to 40 V
DC channels*	Sampling 10 Hz - 50 Hz/60 Hz rejection - reproducibility < 1 mV
System	
Hard disk	PC or Mobi-Disk
Internal battery	up to 1h30 min
Link to PC	100 Mbit/s Ethernet
Weight from	1.4 kg/3 lb to 10 kg/22 lb
* Optional features	



Edificio Antalia
Albasanz, 16
28037 MADRID
Tel. 91 567 97 00
Fax: 91 570 26 61

www.alavaingenieros.com

Torre Mapfre-Vila Olímpica
Marina, 16 - Planta 11-C 2
08005 BARCELONA
Tel. 93 459 42 50
Fax: 93 459 42 62

alava@alava-ing.es

M002-100-2



OROS
23 chemin des pres
Inovallee 4403
F-38944 Meylan Cedex

Tel: +33.811.70.62.36
Fax: +33.476.90.51.37
Mail: info@oros.com
Web: www.oros.com

OROS China
Tel: +86.10.59892134
Fax: +86.10.59892135
Mail: info@oroschina.com
Web: www.oros.com

French Sales Office
Tel: +33.169.91.43.00
Fax: +33.169.91.29.40
Mail: info@orosfrance.fr
Web: www.orosfrance.fr

OROS GmbH
Tel: +49.261.133.96.50
Fax: +49.261.133.96.49
Mail: info@oros-deutschland.com
Web: www.oros-deutschland.com

OROS Inc.
Tel: +1.888.200.0950
Tel: +1.703.478.3204
Fax: +1.703.478.3205
Mail: info@orosinc.com
Web: www.orosinc.com

MATLAB® is a trademark of Mathworks co. ICP® is a trademark of PCB piezoelectronics. Windows XP, Vista and 7, Word and Excel are trademarks of Microsoft Corp. Keyphasor is a trademark of GE. FAIMOS is a trademark of Imc DataWorks. ME-scope is a trademark of Vibration Technology. GlyphWorks is a trademark of nCode. DynaWorks® is a trademark of Intespace. Dynamx™ and Systeo are trademarks of Dynae. NVGate®, NVSolutions®, NVDrive®, MatDrive®, ORBISGate® are trademarks of OROS SA.