



TOP VIEW




180° DOOR SWING SHOWN
90° DOOR SWINGS
SUFFICIENT, 6 PLACES

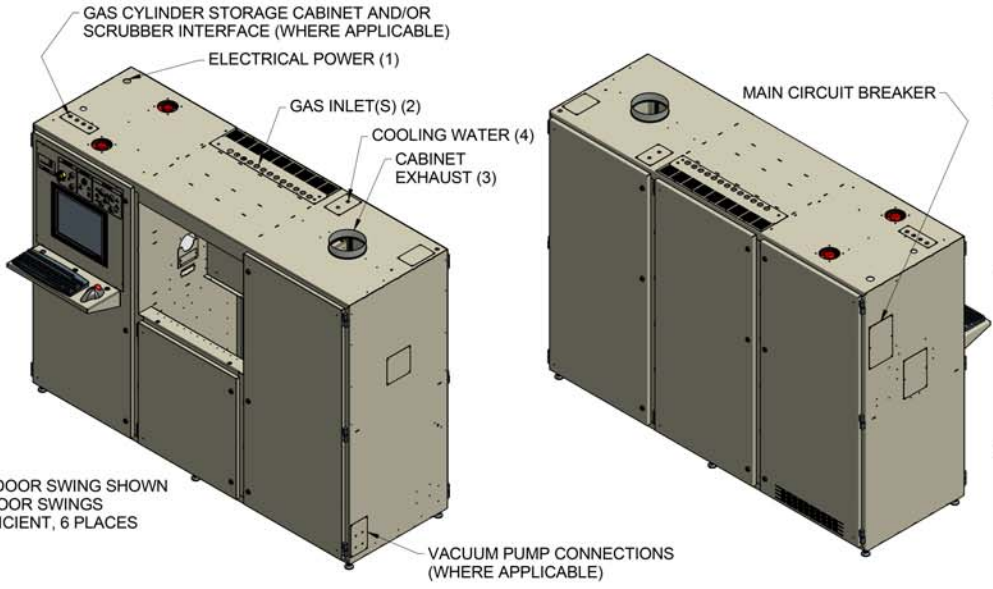


LEFT SIDE VIEW

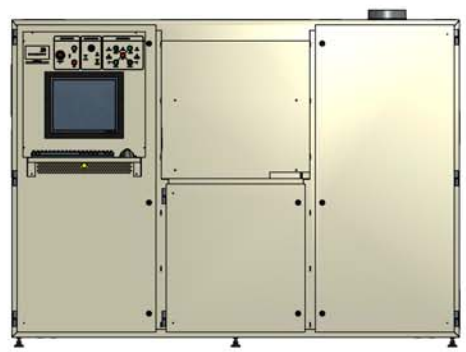

FRONT VIEW

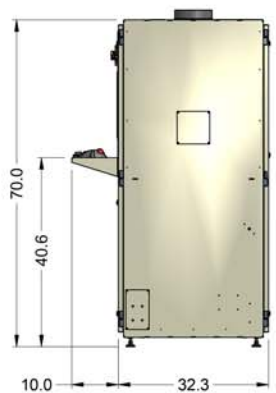

RIGHT SIDE VIEW

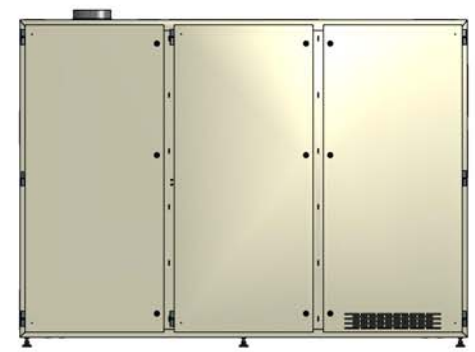

REAR VIEW

FACILITIES REQUIREMENTS

1. ELECTRICAL---BASED ON OPTIONS AND CUSTOMER SUPPLY
2. INLET GASES---BASED ON OPTIONS AND CUSTOMER SUPPLY
3. CABINET EXHAUST---Ø8", 500 CFM
4. COOLING WATER---2 GPM @ 80 PSI 1/4" FNPT IN, 30 PSI MIN DIFFERENTIAL, 1/4" FNPT OUT (HIGHER W/SOME OPTIONS)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES (DIMENSIONS IN BRACKETS [] ON AN OBJECT OR PRODUCT ARE MILLIMETERS AND ARE FOR REFERENCE ONLY)		N/A	
INTERPRET DRAWING AS PER ANSI Y14.1 OR Y14.2		enabling tomorrow's technologies™	
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		firstnano a Division of CVD Equipment Corporation	
X ± .060	± .5	DESIGNED BY: [Signature] 7/30/2010 DRAWN BY: [Signature] 9/13/2010 CHECKED BY: [Signature] ENGINEER APPROVAL: [Signature]	
.XX ± .015	125		
.XXX ± .005	125		
BREAK EDGES TO SHOW DIMENSIONS REFER TO DIM MAX		ET3000 TOP LEVEL ASSEMBLY	
DO NOT SCALE DRAWING		D ET3000-0000 1	
		SHEET 1 OF 1	